


MIG TORCHES & PARTS

(Esab® Compatible)

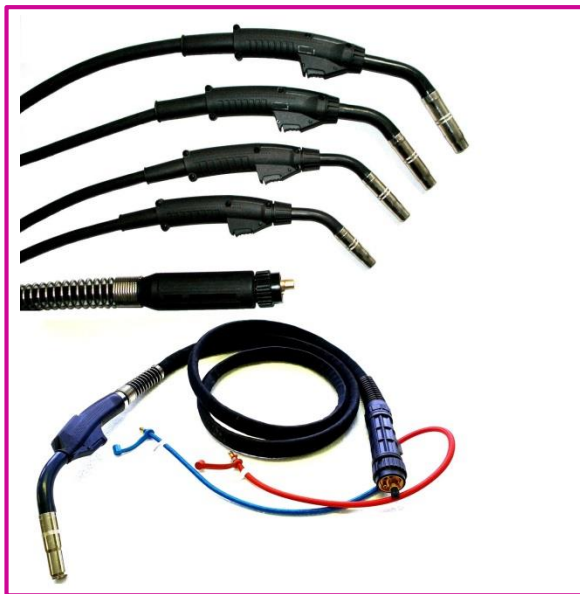

MODEL NOS:

Power at 60%
CO2 - MIX

TW160ES x 4.5-RE	180A – 150A
TW250ES x 4.5-RE	230A – 200A
TW315ES x 4.5-RE	280A – 240A
TW400ES x 4.5-RE	400A – 360A
TW500ES x 4.5-RE	500A – 420A
TW510ESWx4.5	500A-450A (Water Cooled)

Length : 4.5 M or as Required

Connections : Euro, Esab® etc Required

Process : MIG/MAG

Method of Guidance : Manual

Type of cooling : Air or Water

Diameter Range of Solid Wire ; D1.0 - 1.4

And flux cored Wire : D1.6 - 2.4

GAS NOZZLE



PART NO	TORCH
11 GN-16-ES	TW160ES
12 GN-25-ES	TW250ES
13 GN-35-ES	TW315ES
14 GN-40-ES	TW400ES
15 GN-50-ES	TW500ES
17 GN-50-ES-2	TW500ES
18 GIN-50-ES-2	TW500ES
16 GN-510-ES	TW510ES

SWAN NECK



PART NO	TORCH
1 SN-25-ES	TW250ES
2 SN-35-ES	TW315ES
3 SN-40-ES	TW400ES
4 SN-50-ES	TW500ES
5 SN-510-ES	TW510ES

INSULATORS



PART NO	TORCH
21 IN-16-ES	TW160ES
22 IN-25-ES	TW250ES
23 IN-35-ES	TW315ES
24 IN-40-ES	TW400ES
25 IN-50-ES	TW500ES
28 IN-50-ES-2	TW500ES
26 IN-510-ES	TW510ES
27 IN-SN-40-ES	TW400ES
29 IN-SN-40-ES-2	TW400ES

TIP HOLDER



PART NO	THREAD X LENGTH
31 TH-16-ES	M6 x 26
32 TH-25-ES	M6 x 37
33 TH-35-ES	M6 x 40.5
34 TH-40-ES-CU	M8 x 31.5
(4 Holes)	
35 TH-40-ES-CUx8	M8 x 31.5
(8 Holes)	
36 TH-50-ES	M8 x 40
37 TH-ES-CD-1	M6x47.25
38 TH-510-ES	M8x31.5


CONTACT TIPS

(CuCrZr)- M6 & M8



PART NO	TORCH
41 CT-ES-Z27-0.8	M6x27
(Also available Sizes 0.9,1.0,1.2,1.4, 1.6)	
51 CT-ES-Z37-0.8	M8x37
(Also available Sizes 0.9,1.0,1.2,1.2A,1.4, 1.6)	
57 CT-ES-Z52x1.2	M8x52

LINERS



PART NO	TORCH
61 LI-T-ES-8.1x3	1.5x4.5x3.5M (Blk)
62 LI-T-ES-8.3x3	2.5x4.5x3.5M (Grey)
63 LI-T-ES-9.1x3	1.5x4.2x3.5M (Blue)
64 LI-T-ES-9.2x3	2.2x4.2x3.5M (Red)
65 LI-T-ES-9.3x3	3.0x4.5x3.5M (Ylw)
66 LI-16ES-4-N	1.6x4.5M
67 LI-35ES-4-N	2.1x4.5M
72 LI-50ES-6-N	2.4x6.1 M
68 CL-T-ES-2.1	Nylon Collet

TEFLON LINERS



PART NO	DESCRIPTION
69 LI-T-ES-6.3x4	ID 3.0 mm Length* 4.5 M (Hexagon)
70 SPSC-T-6003L	Copper Spring & Screw (28 cm Long)
71 CL-T-ES	Nylon Collet For Liner

* Other Liner Lengths avlbl on request

AUTHORISED DISTRIBUTOR